

# High Step up Dc-Dc Converter For Distributed Power Generation

Jeanmary Jose<sup>1</sup>, Saju N<sup>2</sup>M-Tech Scholar, Department of Electrical and Electronics Engineering, NSS College of Engineering, Palakkad, Kerala,  
India<sup>1</sup>Assistant Professor, Department of Electrical and Electronics Engineering, NSS College of Engineering, Palakkad,  
Kerala, India<sup>2</sup>

**ABSTRACT:** This paper presents, a high voltage gain DC-DC converter for distributed generation (DG) systems with MPPT controller. A high step-up ratio and clamp-mode converter are proposed to achieve high voltage gain and high efficiency. This can be obtained by using two capacitors and one coupled inductor. During the switch-off period, the capacitors are charged in parallel and during the switch-on period they are discharged in series by the energy stored in the coupled inductor. A passive clamp circuit is used to recycle the leakage inductor energy of the coupled inductor, thus voltage stress on the main switch is reduced. The control method for the circuit is implemented using a MPPT controller which tracks the maximum power of the sources. The converter is suitable for high power applications because of the reduced conduction loss and low input current ripple. The operating principle and MATLAB simulations are discussed in detail.

## I. INTRODUCTION

The distributed generation (DG) systems based on the renewable energy sources have rapidly developed in recent years. It is a technique that employs small-scale technologies like photovoltaic (PV) cells, fuel cells and wind power to produce electricity close to the end users of power. Compared to traditional power generators, distributed generators can provide lower-cost electricity, higher power reliability and security with fewer environmental consequences. But these are low voltage sources, thus high step-up dc-dc converters with good efficiency are necessary for connecting these for high voltage applications. To step from low voltage to high voltage, high step-up dc-dc converters are usually used as the front-end converters which are required to have a large conversion ratio, high efficiency and small volume.

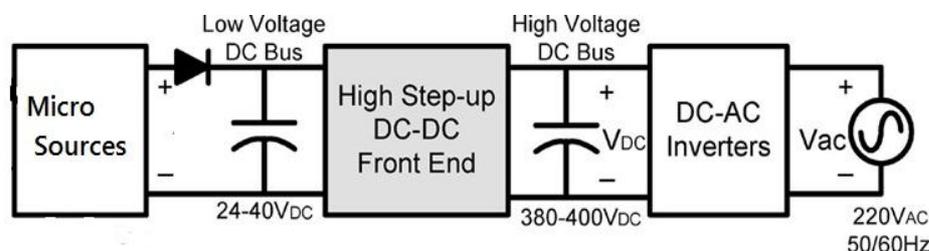


Figure 1 Power Generation Systems

Theoretically the conventional boost converter can provide a high step-up voltage gain with a duty cycle greater than 0.9. But in practice, it cannot achieve a high voltage gain with parasitic parameter limitations. Many step-up converters have been proposed to improve the conversion efficiency. The switched capacitor technique can provide a high step-up voltage gain, but the conduction loss and voltage stress on the switch is more. The coupled inductor technique can be used to obtain a high step-up gain, but the conversion efficiency is limited by the leakage inductor

# International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

## II. MAXIMUM POWER POINT TRACKING

Maximum Power Point Tracking is a technique that grid connected inverters, solar battery chargers and similar devices used to get maximum possible power from one or more photovoltaic devices. The purpose of the MPPT systems is to sample the output of the cells and apply the proper load to obtain maximum power for any given environmental conditions.

### MPPT ALGORITHM

MPPT algorithms are necessary in PV applications because the MPP of a solar panel varies with the irradiation and temperature, so the use of MPPT algorithms is required in order to obtain the maximum power from a solar array. Over the past decades many methods to find the MPP have been developed and published. These techniques differ in many aspects such as required sensors, complexity, cost, range of effectiveness, convergence speed, correct tracking when irradiation and/or temperature change, hardware needed for the implementation.

### Different MPPT techniques

- 1) Perturb and Observe (hill climbing method)
- 2) Incremental Conductance method (INC)
- 3) Fractional short circuit current
- 4) Fractional open circuit voltage
- 5) Neural networks
- 6) Fuzzy logic

Nevertheless, the Perturb and Observe (P&O) and Incremental Conductance (INC) techniques are widely used, especially for low cost implementation. The MPPT algorithm used is Incremental Conductance method (INC).

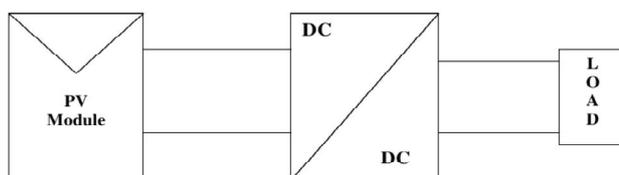


Figure 2 Power conditioning of PV Module

### INCREMENTAL CONDUCTANCE

The theory of the incremental conductance method is to determine the variation direction of the terminal voltage for PV modules by measuring and comparing the incremental conductance and instantaneous conductance of PV modules. If the value of incremental conductance is equal to that of instantaneous conductance, it represents that the maximum power point is found. Incremental conductance method uses voltage and current sensors to sense the output voltage and current of the PV array.

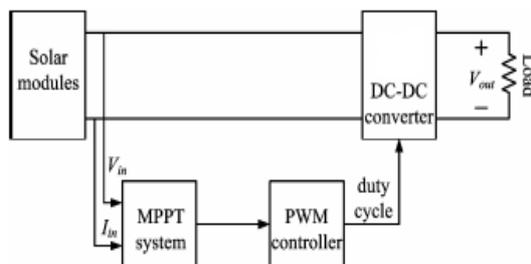


Figure 3 Incremental conductance MPPT

# International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

## III. PROPOSED SYSTEM

The proposed converter combines the switched capacitor and coupled inductor techniques. The switching circuit is formed by using two capacitors and two diodes are connected to the secondary side of the coupled inductor to achieve a high voltage gain. Since the voltage across the capacitors can be adjusted by the turns ratio, a high step-up gain can be achieved. The capacitors are charged in parallel and discharged in series by the coupled inductor. A passive clamp circuit is used to clamp the voltage level on the switch

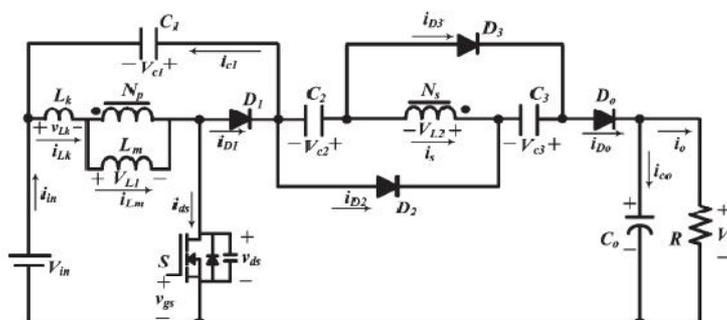


Figure 4 DC-DC converter

Figure 4 shows the circuit topology of the proposed converter, which is composed of dc input voltage  $V_{in}$ , main switch  $S$ , coupled inductors  $N_p$  and  $N_s$ , one clamp diode  $D_1$ , clamp capacitor  $C_1$ , two capacitors  $C_2$  and  $C_3$ , two diodes  $D_2$  and  $D_3$ , output diode  $D_o$ , and output capacitor  $C_o$ . The equivalent circuit model of the coupled inductor includes magnetizing inductor  $L_m$ , leakage inductor  $L_k$ , and an ideal transformer. The leakage inductor energy of the coupled inductor is recycled to capacitor  $C_1$  and thus, the voltage across the switch  $S$  can be clamped. The voltage stress on the switch is reduced significantly. Thus, low conducting resistance  $R_{DS(ON)}$  of the switch can be used. The proposed converter combines the concept of switched-capacitor and coupled-inductor techniques. Based on the concept, the proposed converter puts capacitors  $C_2$  and  $C_3$  on the secondary side of the coupled inductor. The capacitors  $C_2$  and  $C_3$  are charged in parallel and are discharged in series by the secondary side of the coupled inductor when the switch is turned off and turned on respectively. Because the voltage across the capacitors can be adjusted by the turn ratio, the high step-up gain can be achieved significantly. Also, the voltage stress of the switch can be reduced. The parallel-charged current is not inrush. Thus, the proposed converter has low conduction loss. Moreover, the secondary-side leakage inductor of the coupled inductor can alleviate the reverse-recovery problem of diodes, and the loss can be reduced. In addition, the proposed converter achieves a high step-up gain without an additional winding stage of the coupled inductor. The coil is less than that of other coupled inductor converters.

## IV .OPERATING PRINCIPLE

The main operating principle is that, when the switch is turned on, the coupled-inductor-induced voltage on the secondary side and magnetic inductor  $L_m$  is charged by  $V_{in}$ . The induced voltage makes  $V_{in}$ ,  $V_{C1}$ ,  $V_{C2}$ , and  $V_{C3}$  release energy to the output in series. When the switch is turned off, the energy of magnetic inductor  $L_m$  is released via the secondary side of the coupled inductor to charge capacitors  $C_2$  and  $C_3$  in parallel. The converter operating in continuous conduction mode (CCM) is discussed below. In CCM operation, there are five operating modes in one switching period. The operating modes are described as follows.

Mode I :

During this mode,  $S$  is turned on. Diodes  $D_1$  and  $D_o$  are turned off, and  $D_2$  and  $D_3$  are turned on. The current-flow path is shown .The voltage equation on the leakage and magnetic inductors of the coupled inductor on the primary side is expressed as  $V_{in} = V_{Lk} + V_{Lm}$ . The leakage inductor  $L_k$  starts to charge by  $V_{in}$ . Due to the leakage inductor  $L_k$ , the

## International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

secondary-side current  $i_s$  of the coupled inductor is decreased linearly. Output capacitor  $C_o$  provides its energy to load  $R$ . When current  $i_{D2}$  becomes zero, this operating mode ends.

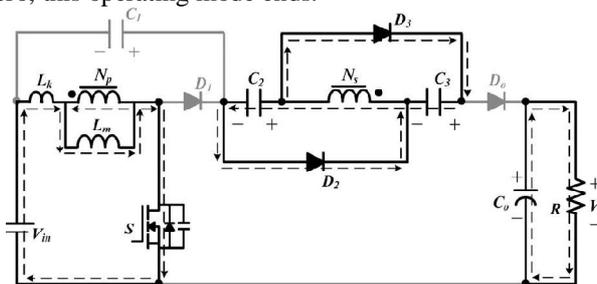


Figure 5 Mode I

Mode II :

During this time interval,  $S$  remains turned on. Diodes  $D_1$ ,  $D_2$ , and  $D_3$  are turned off, and  $D_o$  is turned on. The current-flow path is shown. Magnetizing inductor  $L_m$  stores energy generated by dc source  $V_{in}$ . Some of the energy of dc-source  $V_{in}$  transfers to the secondary side via the coupled inductor. Thus, the induced voltage  $V_{L2}$  on the secondary side of the coupled inductor makes  $V_{in}$ ,  $V_{C1}$ ,  $V_{C2}$ , and  $V_{C3}$ , which are connected in series, discharge to high-voltage output capacitor  $C_o$  and load  $R$ . This operating mode ends when switch  $S$  is turned off.

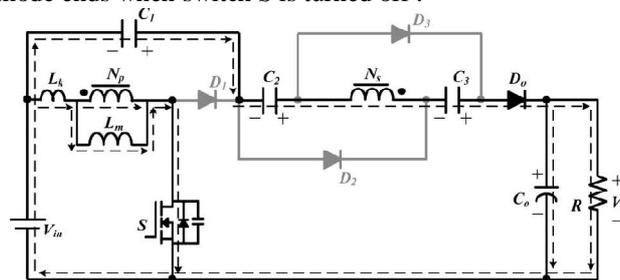


Figure 6 Mode II

Mode III

During this time interval,  $S$  is turned off. Diodes  $D_1$ ,  $D_2$ , and  $D_3$  are turned off, and  $D_o$  is turned on. The current-flow path is shown. The energies of leakage inductor  $L_k$  and magnetizing inductor  $L_m$  charge the parasitic capacitor  $C_{ds}$  of main switch  $S$ . Output capacitor  $C_o$  provides its energy to load  $R$ . When the capacitor voltage  $V_{C1}$  is equal to  $V_{in} + V_{ds}$  diode  $D_1$  conducts, and this operating mode ends.

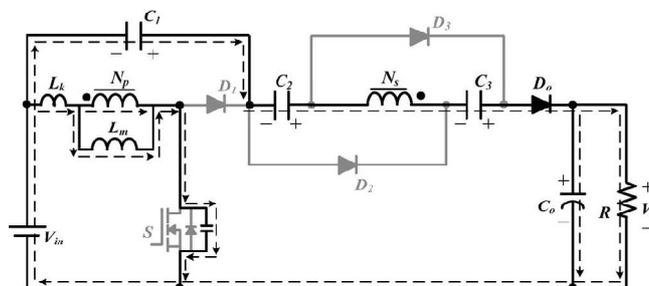


Figure 7 Mode III

Mode IV :

During this time interval,  $S$  is turned off. Diodes  $D_1$  and  $D_o$  are turned on, and  $D_2$  and  $D_3$  are turned off. The current-flow path is shown. The energies of leakage inductor  $L_k$  and magnetizing inductor  $L_m$  charge clamp capacitor  $C_1$ . The energy of leakage inductor  $L_k$  is recycled. Current  $i_{Lk}$  decreases quickly. Secondary-side voltage  $V_{L2}$  of the coupled inductor continues charging high-voltage output capacitor  $C_o$  and load  $R$  in series until the secondary current of the

## International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

coupled inductor  $i_s$  is equal to zero. Meanwhile, diodes  $D_2$  and  $D_3$  start to turn on. When  $i_{D_o}$  is equal to zero this operating mode ends.

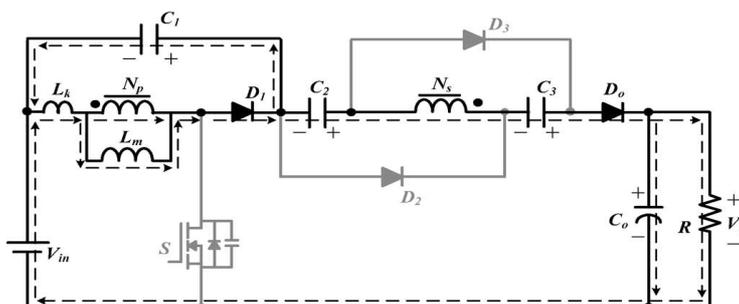


Figure 8 Mode IV

Mode V :

During this time interval,  $S$  is turned off. Diodes  $D_1$ ,  $D_2$  and  $D_3$  are turned on, and  $D_o$  is turned off. The current-flow path is shown. Output capacitor  $C_o$  is discharged to load  $R$ . The energies of leakage inductor  $L_k$  and magnetizing inductor  $L_m$  charge clamp capacitor  $C_1$ . Magnetizing inductor  $L_m$  is released via the secondary side of the coupled inductor and charges capacitors  $C_2$  and  $C_3$ . Thus, capacitors  $C_2$  and  $C_3$  are charged in parallel.

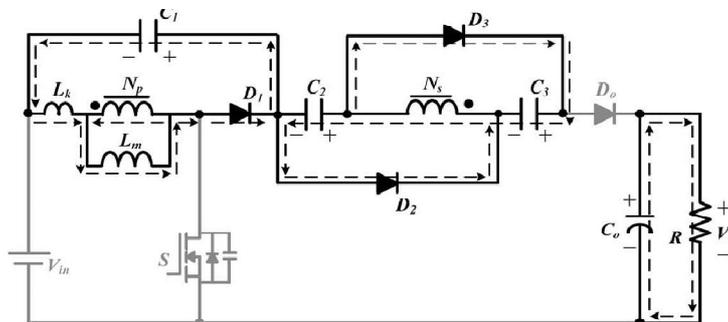


Figure 9 Mode V

### V.BASIC SIMULATION

The converter was simulated with MATLAB software.

Table 1

Parameters	Ratings
Input voltage	24V
Switching Frequency	50kHz
Coupled Inductor	$L_m=48\mu\text{H}, L_k=0.25 \mu\text{H}$
Capacitors	$C_1=56\mu\text{F}/100\text{V}, C_2/C_3 = 22\mu\text{F}/200\text{V},$ $C_o= 180 \mu\text{F}/450\text{V}$

# International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

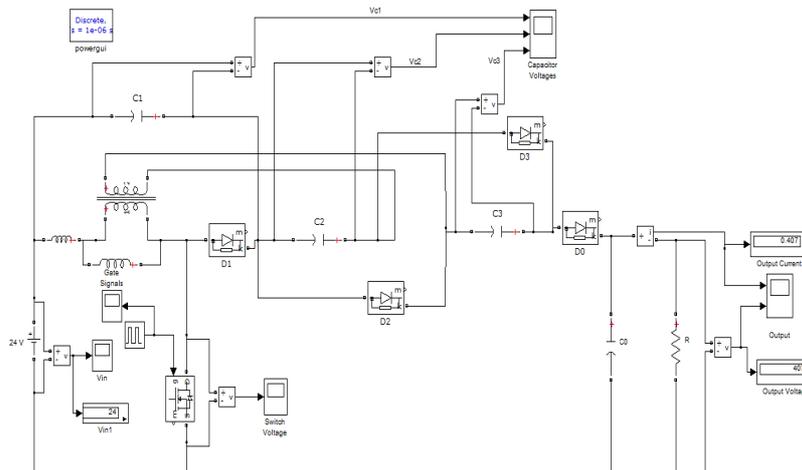


Figure 10 Simulink Model Of converter

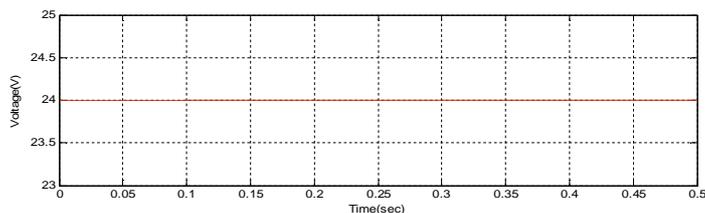


Figure 11 Simulation Result of Input Voltage

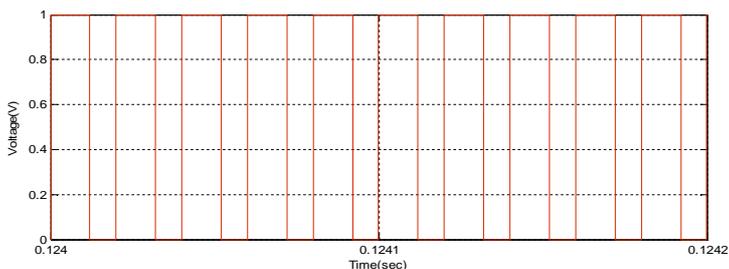


Figure 12 Simulation Result of Switching Signals

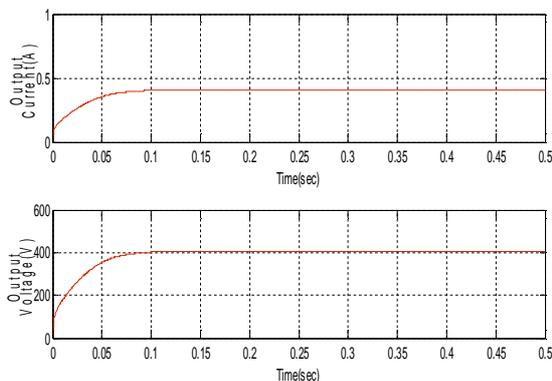


Figure 13 Simulation Result of Output Current & Output Voltage

# International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

The DC-DC converter was simulated for an input of 24V and a load resistance of 1kΩ .The output voltage was obtained as 400V.

## PV SIMULATION WITH MPPT CONTROLLER

The converter can be used for distributed generation systems so it is simulated in MATLAB software with a photovoltaic array as input. MPPT controller is used to get the maximum output. The simulink model of the system is shown in figure 14.The output voltage was obtained as 400V.

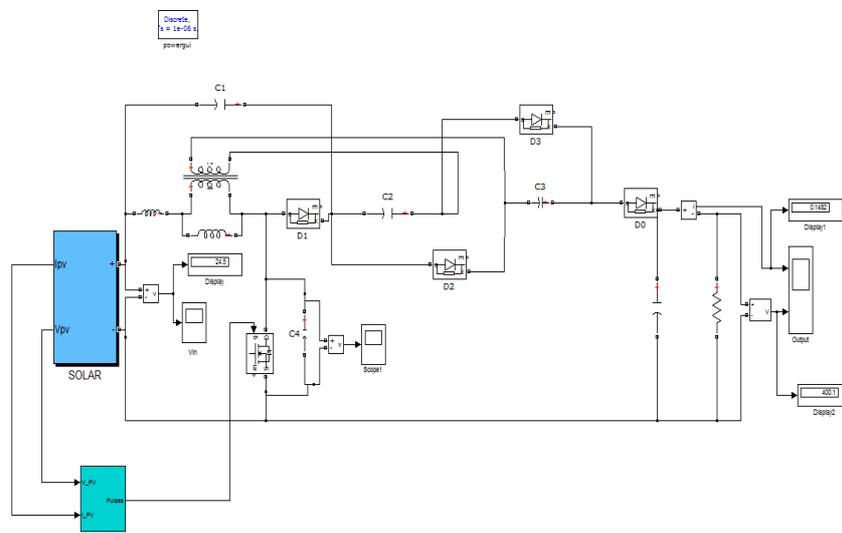


Figure 14 Simulink Model Of converter with PV and MPPT

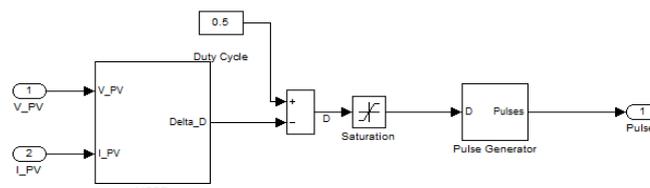


Figure 15 Simulink Model Of MPPT

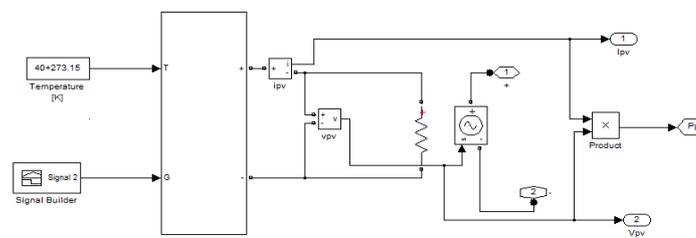


Figure 16 Simulink Model Of PV Cell

# International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

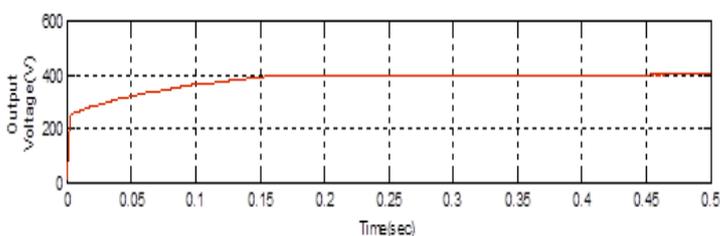


Figure 17 Simulation Result of Output Voltage

## VI. EXPERIMENTAL RESULTS

A prototype of the converter with following specifications has been implemented.

Table 2

Parameters	Ratings
Input voltage	12V
Coupled Inductor	ETD 39, $N_p:N_s = 1:20$ , $L_m = 3\text{mH}$
Capacitors	$C_1 = 150\mu\text{F}/450\text{V}$ , $C_2/C_3 = 10\mu\text{F}$ , $C_0 = 220\mu\text{F}/450\text{V}$
Load Resistance	100k $\Omega$
Microcontroller	PIC18F4550
MOSFET	IRF830
Diode	MUR1520

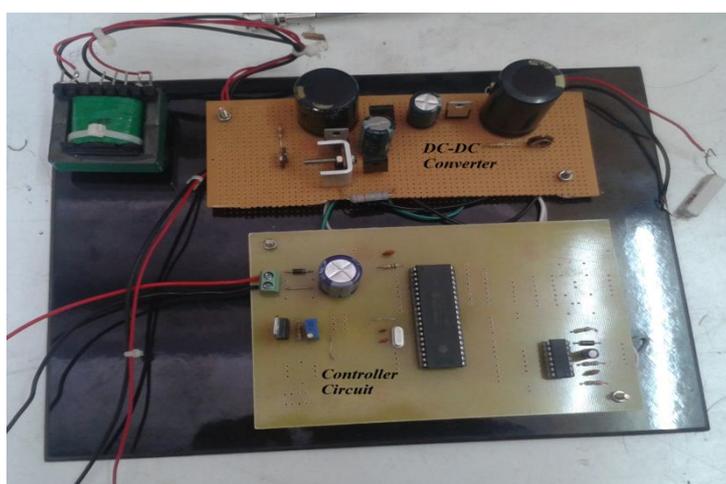


Figure 18 Experimental set up of converter

A 5V power supply is given to the PIC microcontroller for generating the gating signals to the MOSFET. The gating signals are given to the MOSFET through MOSFET driver. An input voltage of 12V was applied to the converter using a battery. The switching signals to the MOSFET are generated at a frequency of 50kHz. An output voltage of 200V was obtained. The converter was also connected to a PV panel and the output voltage was verified. The switching signals are as shown in Figure 19.

# International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

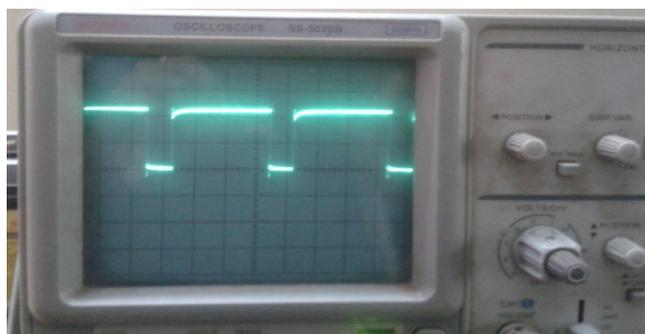


Figure 19 Switching Signals to MOSFET

The output was verified using a CRO. The output waveform is as shown in Figure 20.

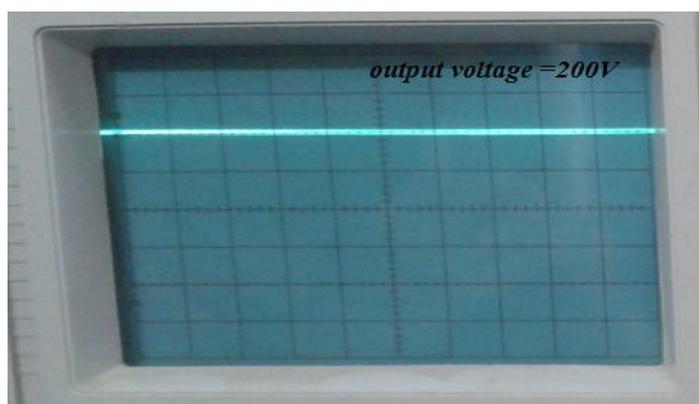


Figure 20 Output Voltage Waveform

## VII.CONCLUSION

In this paper a high step-up dc-dc converter for distributed power generation is discussed. By using the capacitor charged in parallel and discharged in series by the coupled inductor this converter provide high step-up voltage gains and high efficiency. It also has low input current ripple and low conduction losses, making it suitable for high power applications. The turn ratio of the coupled inductor is 1:4, but the output voltage of the converter is 16 times greater than the input voltage. The converter transfers the capacitive and inductive energy simultaneously to increase the total power delivery.

## REFERENCES

- [1] M.M.Jovanovic, and Y. Jang, 'A new soft-switched boost converter with isolated active snubber', *IEEE Trans. Ind. Appl.*, pp. 496–502, March 1999
- [2] N. P. Papanikolaou and E. C. Tatakis, "Active voltage clamp in flyback converters operating in CCM mode under wide load variation," *IEEE Trans. Ind. Electron.*, vol. 51, no. 3, pp. 632–640, Jun. 2004.
- [3] Q. Zhao, F. Tao, Y. Hu, and F. C. Lee, "Active-clamp DC/DC converter using magnetic switches," in *Proc. IEEE Appl. Power Electron. Conf. Expo.*, pp. 946–952., April 2001
- [4] B. R. Lin and F. Y. Hsieh, "Soft-switching zeta-flyback converter with a buck-boost type of active clamp," *IEEE Trans. Ind. Electron.*, vol. 54, no. 5, pp. 2813–2822, Oct. 2007.
- [5] B. Axelrod, Y. Berkovich, and A. Ioinovici, "Switched-capacitor/switched-inductor structures for getting transformerless hybrid dc-dc PWM converters," *IEEE Trans. Circuits Syst. I, Reg. Papers*, vol. 55, no. 2, pp. 687–696, Mar. 2008.
- [6] Da Silva, E.S., Dos Reis Barbosa, L., Vieira, J.B., De Freitas, L.C., and Farias, V.J.: 'An improved boost PWM soft-single-switched converter with low voltage and current stresses', *IEEE Trans. Ind. Electron.*, 48, (6), pp. 1174–1179, 2001



ISSN (Print) : 2320 – 3765  
ISSN (Online): 2278 – 8875

## International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Special Issue 5, December 2014

- [7] Roh, C.W., Han, S.H., and Youn, M.J.: 'Dual coupled inductor fed isolated boost converter for low input voltage applications', *Electron.Lett.*, 35, pp. 1791–1792,1999
- [8] Q. Zhao and F. C. Lee, "High-efficiency, high step-up dc–dc converters," *IEEE Trans. Power Electron.*, vol. 18, no. 1, pp. 65–73, Jan. 2003.
- [9] L. Huber and M. M. Jovanovic, "A design approach for server power supplies for networking," *Proc. IEEE Applied Power Electronics Conf.APEC'00*, vol. 2, pp. 1163–1169, Feb. 2000.
- [10] R. J. Wai, C. Y. Lin, C. Y. Lin, R. Y. Duan, and Y. R. Chang, "High efficiency power conversion system for kilowatt-level stand-alone generation unit with low input voltage," *IEEE Trans. Ind. Electron.*, vol. 55, no. 10, pp. 3702–3714, Oct. 2008.
- [11] M. Lokhanadham , K. VijayaBhaskar , "Incremental Conductance Maximum Power Point Tracking(MPPT) for Photovoltaic System ,"International Journal of Engineering Research Application, vol. 2,no. 2,pp 1420-1424,Jan 2009
- [12] Neha Adhikari, Bhim Singh ,A.L.Vyas "Performance Evaluation of a Low Power Solar PV Energy System With Sepic converter," *IEEE PEDS*, Dec 2011
- [13] S. K. Changchien, T. J. Liang, J. F. Chen, and L. S. Yang, "Novel high step-up dc–dc converter for fuel cell energy conversion system," *IEEE Trans. Ind. Electron.*, vol. 57, no. 6, pp. 2007–2017, Jun. 2010
- [14] Surin Bor-Ren Lin,Chien-Lan Huang and Jin –Fa Wan," Analysis ,Design , and Implementation of a Parallel ZVS Converter,". *IEEE Trans. Ind. Electron*, vol 55, no. 4, pp. 1586-1594, April 2008.
- [15] M. G. Villalva, J. R. Gazoli, E. Ruppert F.. "Modeling And Circuit-Based Simulation Of Photovoltaic Arrays" *Brazilian Journal of Power Electronics*, vol.14, no. 1, pp. 35-45, July 2009
- [16] Azadeh Safari and Saad Mekhilef, "Simulation and Hardware Implementation of Incremental Conductance MPPT With Direct Control Method Using Cuk Converter", *IEEE Trans. Ind. Electron.*, vol. 58, no. 4, pp.1154-1161, Apr. 2011.