



MRI Image Compression using Compressed Sensing

Neha Madhukumar¹, Baiju P S²

PG Student [Signal Processing], Dept. of ECE, LBS Institute of Technology for Women, Trivandrum, Kerala, India¹

Assistant Professor, Dept. of ECE, LBS Institute of Technology for Women, Trivandrum, Kerala, India²

ABSTRACT: Magnetic resonance images are known to be sparse in nature. Thus, these images need to be compressed for faster image acquisition. Compressed sensing is an image processing technique where the number of samples required for reconstruction is much lesser than in the traditional methods. Compressed sensing can be applied to MRI images for faster image acquisition thereby providing patient and health care economics. However, the existing compressed sensing method produce image with large artefacts during reconstruction. In this paper we propose a new method, which uses Contourlet Transform for sparsity transform. The reconstruction is done in two stages. The properties of k-space are exploited for perfect reconstruction. The image outline is recaptured using random sampled k-space centre, then the full image is reconstructed by combining the recovered low-frequency k-space and random sampled high frequency data. The accuracy of the proposed method is tested with conventional CS method using wavelet transform as sparsity transform.

KEYWORDS: Compressed sensing (CS), Contourlet transform, k-space.

I. INTRODUCTION

Compressed sensing has got a high demand for fast, efficient and inexpensive algorithms, application and devices. Compressed sensing exploits the sparsity of signal in transform domain and incoherency of the measurements made with the original domain. In compressed sensing we combine sampling and compression into a single step by measuring samples which contain maximum information about the signal and removing samples that are having minimal value. Compressed sensing finds application in diverse fields, ranging from image processing to gathering of geophysics data. This is possible because most of real world signals are sparse.

The theory of compressed sensing states that a signal can be recovered from much fewer samples than required by Nyquist paradigm. The recovered signal will be almost similar to original if it is sparse in nature, i.e., the recovery will be exact if it contains large number of zero coefficients. The number of samples required for reconstruction depends on the algorithm used for reconstruction. In the case of stationary 2-dimensional images, compressed sensing is not capable of providing accurate information; this is because of the residual artefacts that occur during reconstruction.

In this paper, we present a new method to avoid the artifacts caused during reconstruction. The method consists of two stage reconstruction. In this algorithm, the MRI image is initially compressed using contourlet transform. The image outline is created using the densely sampled k-space centre, and then a full image will be recaptured using the recovered low-frequency k-space data and sparsely sampled high frequency data. The accuracy of the proposed method is tested on typical cardiac, angiography and brain MRI images.

II. RELATED WORKS

A. NYQUIST SAMPLING THEOREM

Shannon theorem states that a band limited signal having highest frequency 'f' Hz can be perfectly reconstructed if it is sampled at an interval of $\frac{1}{2}$ 'f' Hz. In traditional method, the signal is uniformly sampled prior to transmission to get 'n' samples. The unnecessary samples are discarded to obtain the compressed signal 'm'. At the receiver side, the original signal is recovered from compressed signal 'm' to produce the original signal.



International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 7, July 2015

A. LOSSLESS COMPRESSION

Image compression is used to remove the redundant information in an image. This is done for the ease of storage and transmission. Image compression may be classified into two: Lossless and Lossy compression. In lossless compression, information content is retained. The data is not lost in the process of compression and decompression. The redundant information is removed during the process of compression and it is added back during the process of decompression.

B. LOSSY COMPRESSION

Lossy compression produces a better compression ratio compared to lossless compression. Here in this method a controlled amount of distortion is allowed during reconstruction. Thus there is always a difference between original and reconstructed image. Apart from having good compression ratio, they are capable of providing low computational cost.

III. THEORETICAL EXPLANATION

A. COMPRESSED SENSING

Compressed sensing is a signal processing technique where the number of samples needed for reconstruction is much lower than that required in traditional sampling method. To make this possible compressed sensing follows two principles: sparsity and incoherence. Sparse matrix is a matrix in which most of the elements are zero. Sparsity is defined as the ratio of number of zero elements to total number of elements in the matrix [1]. Compressed sensing exploits the fact that natural images are usually sparse in nature; these signals can be compressed by projection on suitable domain. A signal is said to be k -sparse if it contains k non-zero coefficients [2].

Suppose X is the signal to be sensed, the sensing process is defined as:

$$Y = X\Phi \quad (1)$$

Φ is called as the measurement matrix and Y is the measurement vector. The measurement matrix is having a size $m \times n$, by the conventional sampling method perfect reconstruction will be possible if m is at least equal to n . But the theory of compressed sensing states that the reconstruction of the signal is possible if m is far less than n provided the signal is sparse. Lower values of m are allowed provided the sensing matrix is more incoherent within the domain in which the signal is sparse. In the receiver end, the reconstruction of the signal is done using non-linear algorithms. The signal of interest is X ,

$$\Psi x = X \quad (2)$$

where x is the sparse vector representing projection coefficients of X on Ψ . The measurement vector can now be defined as:

$$Y = \Theta x \quad (3)$$

where Θ is the reconstruction matrix having size $m \times n$

B. CONTOURLET TRANSFORM

Contourlet form a multi-resolution directional tight frame designed to efficiently approximate images made of smooth regions separated by smooth boundaries. The Contourlet transform has a fast implementation based on a Laplacian Pyramid (LP) decomposition followed by directional filter banks applied on each bandpass subband. This is actually a filter bank structure that takes the smooth contours in an image. The resulting image expansion is a directional multi-resolution analysis framework composed of contour segments, and thus is named contourlet. It gives better results compared to wavelet and curvelet transform since it is a double filter bank structure. It is implemented by pyramidal directional bank filter (PDBF) which decomposes image into directional sub-bands at multiple scales. Based on structure, Contourlet transform is a combination of Laplacian pyramid and directional filter banks i.e., here first we use wavelet-like transform for edge detection, and then a local directional transform for contour segments. The contourlet transform provides a sparse representation for two-dimensional piecewise smooth signals that resemble images.

The Contourlet transform provides a better result due to the grouping of nearby wavelet coefficients. These wavelet coefficients are locally correlated because of the smoothness of the contours. Therefore the sparse expansion of image is obtained by applying a multiscale transform followed by directional transform to gather the nearby basis function at the same scale into linear structure [3].

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 7, July 2015

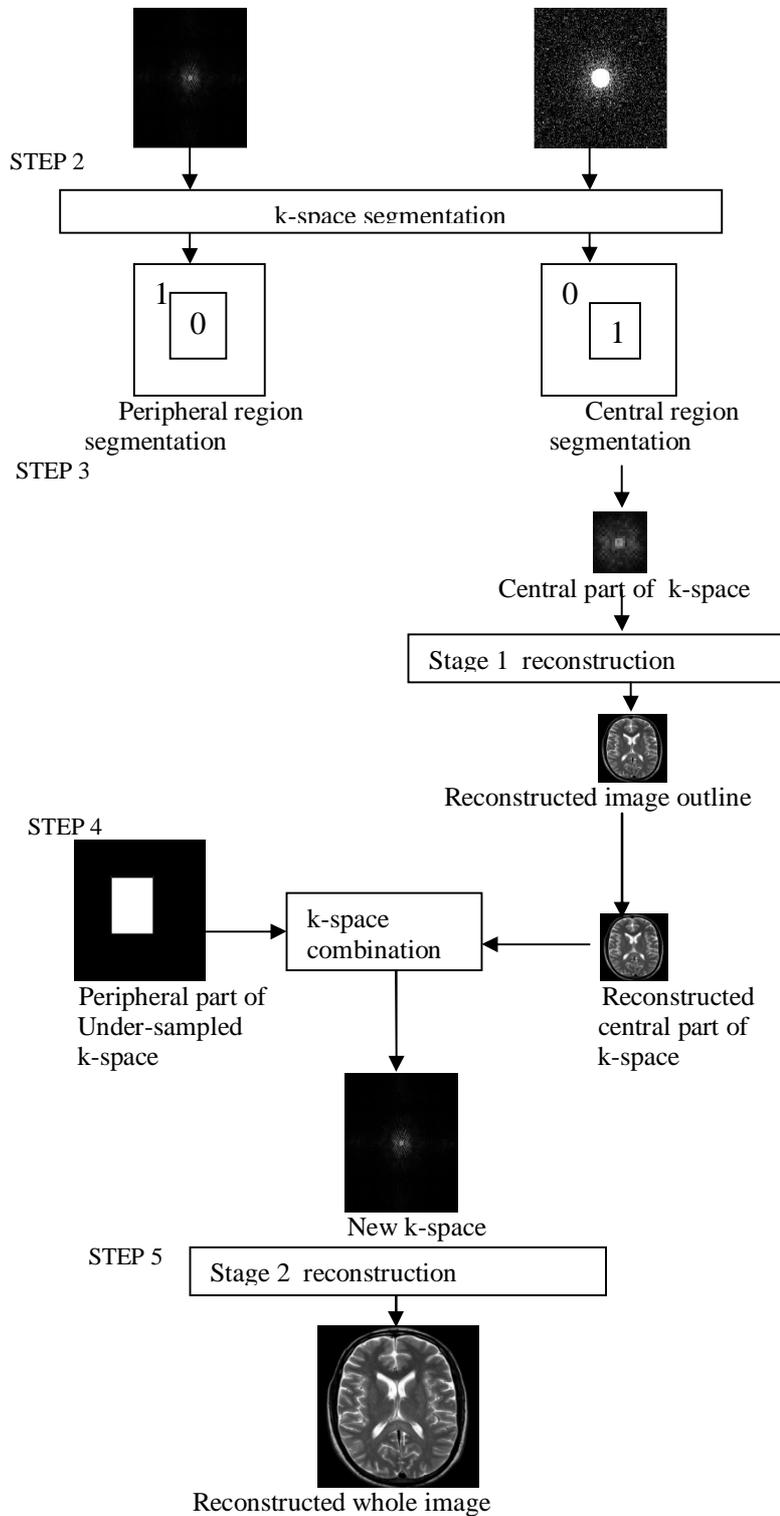


Fig.2. Flow chart of the proposed algorithm

Step3: 2-D random sampling is applied to k-space.

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 7, July 2015

- Step4: The central part of the k-space is segmented out using the strategy explained in Section C, II Theory.
- Step 4: The reconstruction of the image outline involves taking the inverse Fourier transform of the central part of k-space.
- Step 5: k-space combination involves combining the peripheral part of the k-space with the Fourier transform of the image outline obtained in the above step.
- Step 6: The inverse Fourier Transform of the k-space so obtained is taken to obtain the input image.

V.METHOD AND MATERIALS

The performance of the proposed method is tested on three typical MRI images: cardiac cine MR data, sagittal brain MR data and angiography MR data.

The quality of the reconstructed image was assessed using peak signal to noise ratio. All the reconstruction was implemented using a desktop computer utilizing MATLAB. The peak signal to noise ratio is given by:

$$PSNR=20\log_{10} \left(\frac{MAX_I}{\sqrt{\frac{1}{MN} \sum_{i=1}^M \sum_{j=1}^N [I(i,j) - I_{rec}(i,j)]^2}} \right) \quad (5)$$

MAX_I is the maximum possible value of pixel in the image and I_{rec} is the reconstructed image. The difference between the input image and the reconstructed image was taken to visually assess the quality of the reconstructed image.

VI.SIMULATION RESULTS

The proposed method uses Contourlet transform as the sparsity transform. The result obtained is compared with that of wavelet transform.

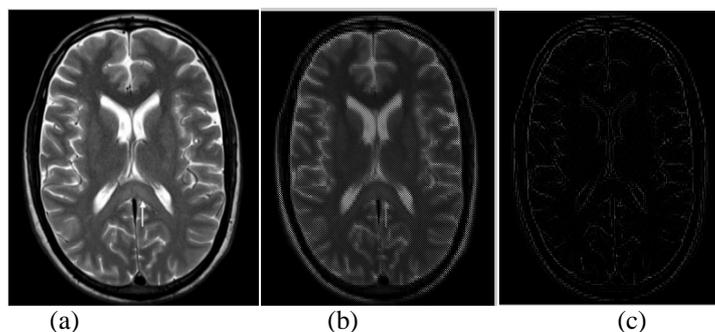


Figure 3.1 (a)Input image (b) Reconstructed image and (c) difference image with wavelet transform as sparsity transform

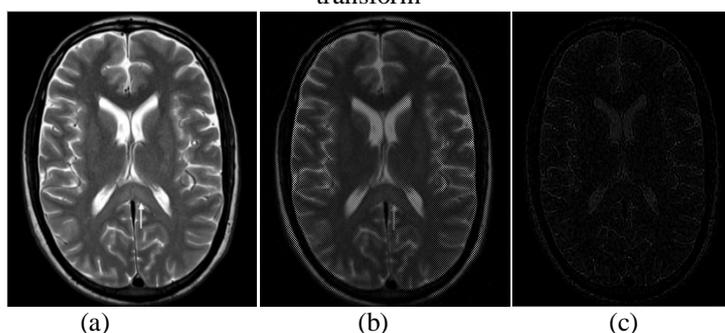


Fig.3.2 (a)Input image (b) Reconstructed image and (c) difference image with Contourlet transform as sparsity transform



International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 7, July 2015

The algorithm is implemented on a desktop computer with Intel Core i7-3770 eight-core Processor and 12GB of RAM utilizing Matlab.

From the Fig 3.1 and 3.2, it is evident that the Contourlet Transform based compresses sensing gives a better result compared to wavelet transform. While using contourlet transform we obtain a PSNR of 30.96 dB which is high compared to 28.37 dB that we obtain while using wavelet transform. The PSNR value is almost increased by 2 dB. This increase in PSNR is due to the two stage reconstruction method. The image was reconstructed using the low frequency and the high frequency component of the k-space.

VII.CONCLUSION

Magnetic resonance images are known to be sparse in nature. These images need to be compressed for the ease of storage and transmission. In this paper we propose a new algorithm with two stage reconstruction. The properties of k-space are exploited for the faithful reconstruction of MRI images. The PSNR value is increased by almost 2 dB.

REFERENCES

- [1]. E.Candès, "Compressive sampling", in Proceedings of the International Congress of Mathematics, vol.3, Citeseer, pp.1433-1452, 2006
- [2]. M. Lustig, D. Donoho and J. M. Pauly, "Sparse MRI: The application of compressed sensing for rapid MR imaging", Magnetic Resonance in Medicine, vol. 58, pp. 1182–1195, 2007.
- [3]. Laleh Panjeh Shahi, Ahmad Shalbaf, RDCS, Richard Zahra Alizadeh sani, Hamid Behnam, "Noise Reduction In Echocardiography Images Using Contourlet Transform", *Biomedical Engineering (MECBME)*, 2011 1st Middle East Conference 21-24 Feb. 2011.
- [4]. Y. Yu, J. Jin, F. Liu, S. Crozier, "Multidimensional Compressed Sensing MRI Using Tensor Decomposition-based Sparsifying Transform", PLoS One. 9(6):e98441, Jun 5 2014.
- [5]. Michael Lustig, David L. Donoho, Juan M. Santos, and John M. Pauly, "compressive sampling", IEEE Signal Processing Magazine March 2008
- [6]. E. Cande's and D. Donoho, 'Curvelets – a surprisingly effective nonadaptive representation for objects with edges', in Cohen, A., Rabut, C., Schumaker, L. (Eds.) 'Curves and surfaces' pp. 105–120, (Vanderbilt University Press, Nashville, TN, USA, 2000).
- [7]. Z. Feng, F. Liu, M. Jiang, S. Crozier, H. Guo and Y. Wang, "Improved l1-SPIRiT using 3D walsh transform-based sparsity basis", Magnetic Resonance Imaging, vol. 32, no. 7, pp. 924–933, 2014.
- [8]. M. Hong, Y. Yu, H. Wang, F. Liu and S. Crozier, "Compressed sensing MRI with Singular Value Decomposition based sparsity basis", Physics in Medicine and Biology, vol. 56, no. 19, pp. 6311–6325, 2011.
- [9]. Kyuyeol Kim, Wu R, Shea Choi, "K-space sampling using various filters and Fourier image reconstruction", Signal Processing in Medical and Biology symposium, 2014 IEEE.
- [10]. N.P.B. Madore, G.H. Glover, "Unaliasing by fourier-encoding the overlaps using the temporal dimension (UNFOLD), applied to cardiac imaging and fMRI," *Magn. Reson. Med.*, vol. 42, no. 5, pp. 813–828, 1999.

BIOGRAPHY



Neha Madhukumar received her B.Tech in Electronics and Communication Engineering degree from University of Kerala in 2013. At present she is a fourth semester M.Tech student at LBS Institute of Technology for Women, Trivandrum, India.



Baiju P S received B.Tech in Electronics and Communication Engineering degree and M. Tech in Signal Processing degree from University of Kerala. He is currently working as Assistant Professor in Department of Electronics and Communication at LBS Institute of Technology for Women, Trivandrum, India from the year 2008.