



ISSN (Print) : 2320 – 3765
ISSN (Online): 2278 – 8875

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

Real Time Parking Guidance System

Pooja Powar¹, Prof. Rajendra Babar²

ME 2nd Year Student [VLSI], Dept. of E&TC Sinhgad Institute of Technology, Lonavala, SPPU Pune, India¹

Asst. Professor & PG Co-ordinator, Dept. of E&TC, Sinhgad Institute of Technology, Lonavala, SPPU Pune, India²

ABSTRACT: The objective of this project is to design a real time parking guidance system based on Raspberry pi microcontroller which also enables use of Internet of things for additional applications. Basic goal of the system is to detect incoming vehicles in parking area and to upload the information of the same on website created. The system provides real time information of vacant slots so that the efforts of drivers for finding empty parking slots are reduced. A raspberry pi board is a heart of the system. IR sensor is used to detect the vehicles and the information is send to raspberry pi controller and later it is uploaded to a website. Users will be given a user ID and password and they can access the information through website. This logic can be extending to display the information of vacant parking slots on a display board at the entrance of parking area. The system also contains two more security measures which are fire alarm and safety switch. Fire alarm will sense the change in temperature and after certain point if fire is detected then buzzer will start and alert message will display on server. For safety switch, if someone in parking area is in trouble especially any women then they will press the switch and buzzer will start and HELP message will display on the server so that related staff will take care of the situation. So basically it is advanced and real time system with security measures which not only is a parking guidance system but also acts as a basic security system for parking areas.

KEYWORDS:Raspberry pi, IR sensor, Fire sensor, Buzzer, safety switch, Ethernet

I.INTRODUCTION

Now-a-days increase in civilization has increased number of vehicles all around the world. But because of limited places for parking problem of vehicle parking is occur. Also while searching for empty parking places drivers get frustrated and waste of time, waste of fuel take place. Because of waste of fuel, emission of gases due to burning of fuel is increased. It leads to unwanted pollution of air. To avoid this problem a system which gives real time information about empty parking slots is require. Use of parking area will also get optimized because of this. Presently available parking systems are not having facility of IOT (Internet of things) and other advanced security applications. So an attempt is made to design a real time parking guidance system using raspberry pi microcontroller. This system can be very useful in parking areas such as institutes, offices etc.

Main working principle of the system is to detect vehicles which are coming in parking area and send the information of vacant and busy parking slots to microcontroller. Then this information will upload on the website created. Every user will be provided a unique user ID and password to access the website. The system also contains two more security measures which are fire alarm and safety switch. Fire alarm will sense the change in temperature and after certain point if fire is detected then buzzer will start and alert message will display on server. For safety switch, if someone in parking area is in trouble especially any women then they will press the switch and buzzer will start and HELP message will display on the server so that related staff will take care of the situation. So it is an advanced parking guidance system with security measures. Approximate cost of this system is 8000 Rs.-10000 Rs.

A. BACKGROUND

Because of increased civilization many other sources are important for human beings to live. This leads to limited and congested space for parking slots in most of the cities. Congested parking slots cause problem of parking a vehicle and frustration of drivers. Drivers may leave the parking area without knowing if parking slots are available or not. For this purpose drivers should know about the available places for parking. Many concepts are invented for this. Presently available systems such as inductive loop based system; RFID card based systems etc. are so complex to use it in institutes, colleges or in regular parking areas. Also they don't have additional security applications like this system.

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

The counter detector types of systems also count people going in the parking area and thus introduce error in detecting vehicles. But in this system there is no such disadvantage of error. Also the use of raspberry pi board provides advantage of IOT (Internet of things). Using this we have designed prototype of parking guidance system with fire alarm and safety switch.

II.METHODOLOGY

A. PROPOSED SYSTEM

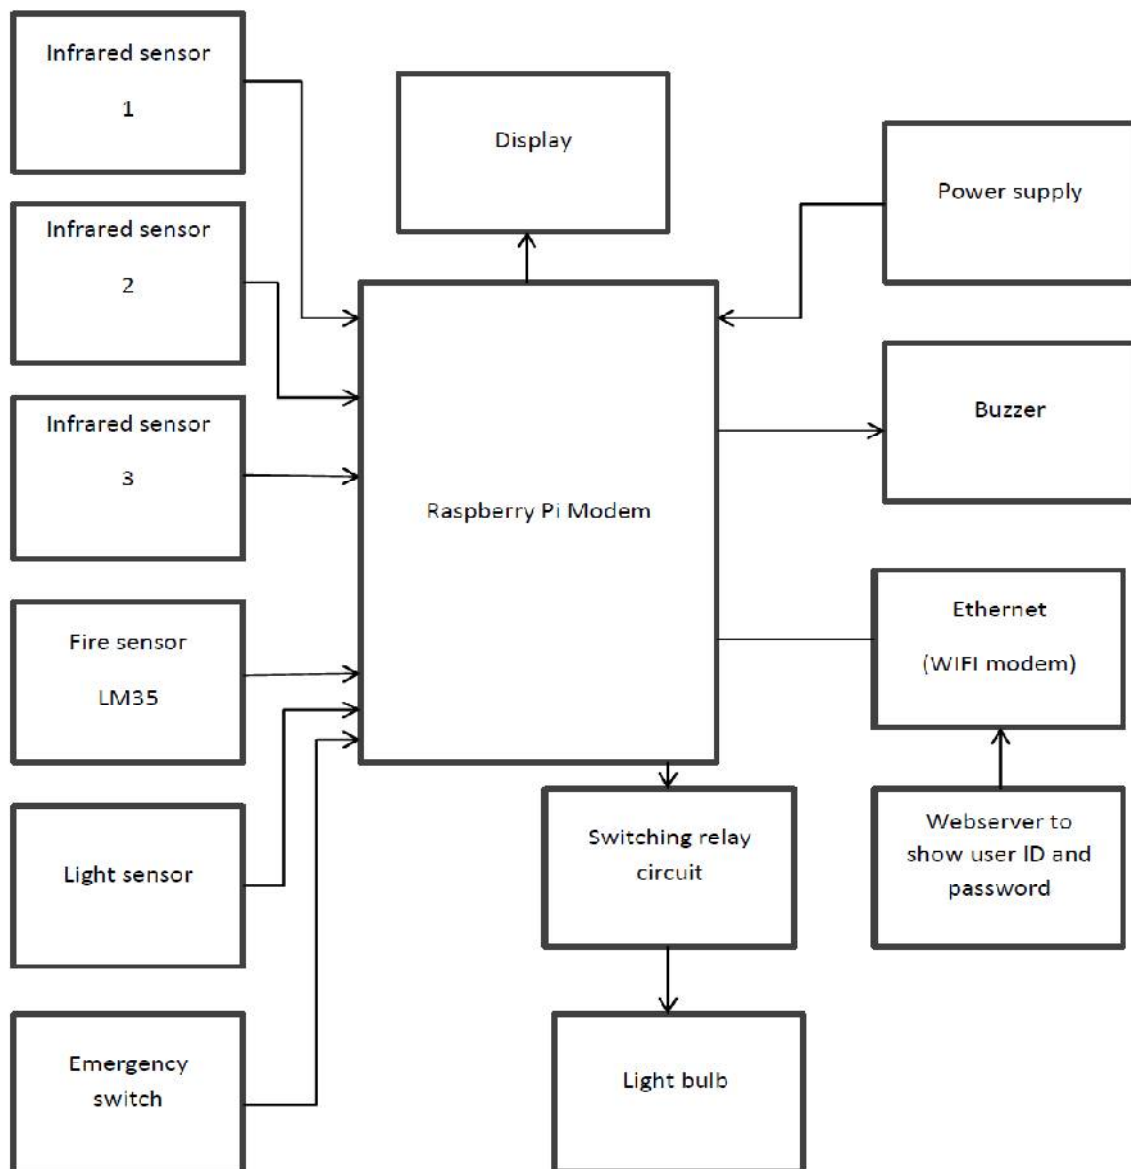


Fig 1. Block diagram of system

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

Fig. 1 shows block diagram of the system. System uses ARM 8 Raspberry pi controller as a main controller. Which gives 1.2 GHz speed and operates on +5V with current of 700 mA. Infrared sensor which is also known as IR sensor is used for sensing of vehicles. Multiple numbers of IR sensors are required for this purpose. IR sensor senses the incoming vehicle as an obstacle and it will send signal to raspberry pi and it will then upload information on website through webservice. User will be given a user ID and password to log in to the website. Then it will enable them to the access of the website.

Now another option is there for the users with no user ID and password. Information also can be displayed on a display board at the entrance of parking area. Additional security purpose of the system is Fire sensor and emergency switch. Fire sensor LM 35 will detect the change in temperature. After increase in temperature above threshold level, it will detect if fire is occur or not. If fire is detected then it will send signal to microcontroller and then alert message will appear on server screen. Also the buzzer will be ON. Emergency switch is the switch for safety of people in parking area. If any woman or any person in area sense an unusual activity then after pressing the switch it will send signal to microcontroller and buzzer will turn ON. Alert message for help also will be displayed on server.

B. RASPBERRY PI ARM 8

The proposed system uses ARM 8 Raspberry pi as a main controller. It operates on +5V input supply and 700mA current. It offers 1.2 GHz speed for the operation. Raspberry pi is basically a tiny credit card size computer with high accuracy and simple to use. It can be connected to our computer or laptop or TV to use for different applications such as web browsing, gaming, programming, MS office applications etc.



Fig 2. Interfacing of Raspberry pi

Fig. 2 shows interfacing of raspberry pi microcontroller. It shows the connections require to access use of raspberry pi as a computer server. Interfacing details for raspberry pi is as:

- 40 GPIO pins- These are general purpose input output pins of raspberry pi. Using these pins we can connect any external hardware circuit to raspberry pi e.g relay circuit, sensor modules, buzzers etc. In this system we are connecting IR sensor module, emergency switch module, buzzer and relay circuit to these pins.
- Micro SD card- Micro SD card is external memory card slot for operation of raspberry pi. It requires 8 GB

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

memory card with operating system installed in it. We are using Raspbian OS in this project.

- Display port- The port is used to connect a display module in order to display the output.
- Input +5V- Input required to operate this controller is +5V so supply of +5V is connected to this slot.
- HDMI video output- This slot is used to display output of the system in video format. HDMI cable of computer is connected here to achieve video output.
- USB port- Universal serial bus port of raspberry pi enables connection of peripherals such as USB cable, pen drive, mouse, keyboards, webcam etc.
- LAN port- Local area network port is used to share internet between two or more computer devices in a particular limited area. We can connect LAN cable to use internet connection on raspberry pi.
- Audio jack- Using audio jack we can get output in audio format by using audio earphones or headphones. We can play music on earphone by connecting it to audio jack.
- Camera port- By connecting camera to this port we can share image data from camera to the raspberry pi computer.

C. IR SENSOR MODULE

Infrared sensor offers simple, user friendly, accurate and fast obstacle sensing using an infrared. IR module is used to sense the vehicles which are coming into the parking slot. Multiple IR sensors are required for this depending on the capacity of parking area. We are using three IR sensor modules because it is a prototype design of parking system.

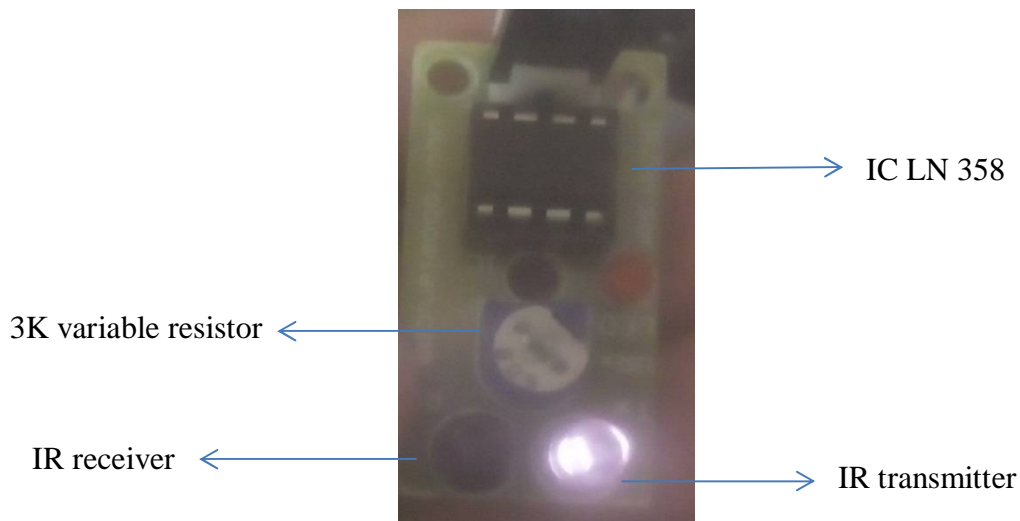


Fig 3. IR sensor module

Fig. 3 shows IR sensor module. It contains IR transceiver, voltage comparator IC LM 358 and a variable resistor of 3K. The basic concept of IR (infrared) obstacle detection is to transmit the IR signal radiation in a direction and a signal is received at the IR receiver when the IR radiation bounces back from a surface of the object. Then the reflected signal is received by an IR receiver. This information of detected vehicles in a particular area in parking lot is then sent to microcontroller raspberry pi. It then uploads the information to the website created. Variable resistor is used to adjust the intensity of sensor. The more the intensity is the more area of obstacle will be sensed by IR sensor. Voltage comparator IC LM 358 is used to compare the reference voltage.



International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

III. RESULT

For getting the result of the system experimental set up is organised. For that IR sensor module should be fitted in the parking slots and raspberry pi should be interfaced on the server as discussed earlier. Result of the system will appear on server as well as on the website. Initially when there are no parking places allotted and no siren ON then it will show result as shown in fig.4

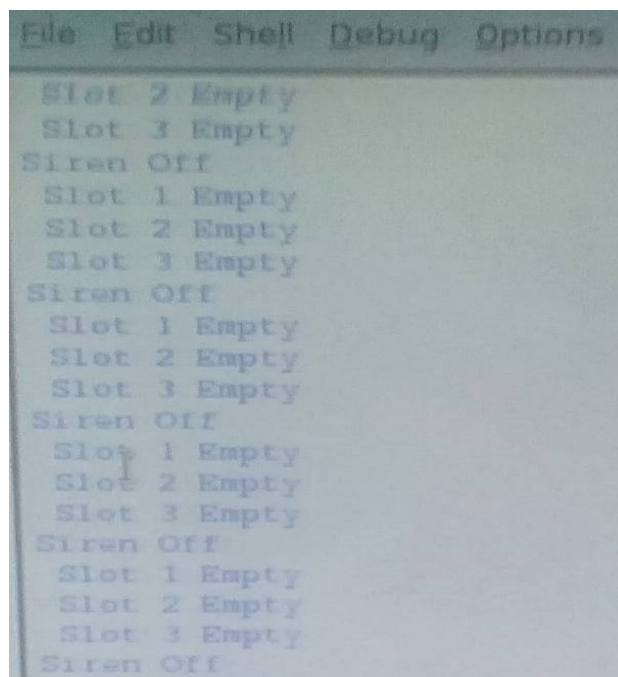


Fig4. Result at initial stage

If all the slots are empty and someone turned the emergency switch ON then it will show result as shown in fig.5



International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

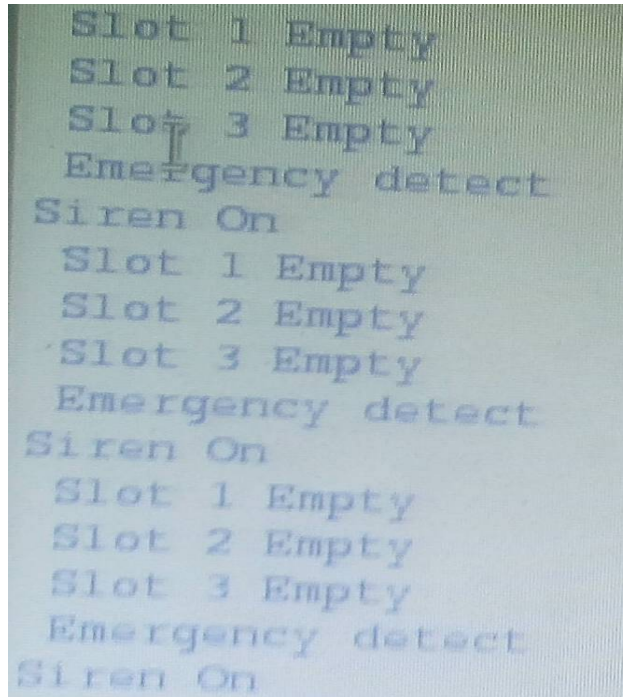


Fig. 5 Result after turning ON the emergency switch

If all the parking slots are full and emergency switch is ON then output result of the system will be as shown in fig.6.

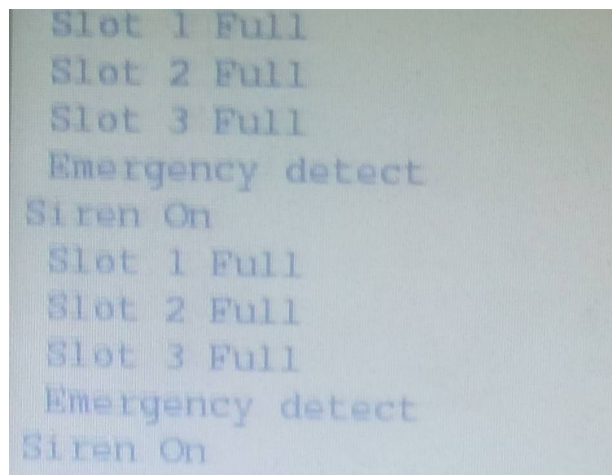


Fig. 6 Result after all slots are full and emergency switch ON

Thus we get the result of the system on server. We can display result on the display board for new users arriving at the entrance of premises. For that purpose display board is interfaced with display port of microcontroller raspberry pi.



ISSN (Print) : 2320 – 3765
ISSN (Online): 2278 – 8875

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijareeie.com

Vol. 6, Issue 3, March 2017

IV. CONCLUSION AND RECOMMENDATIONS

The vehicle count feature monitors overall count of the parking lot in real time. This system can help the drivers to know the available number as well as taken number of parking spaces before entering the premises. The test results show that the system is accurate enough to use it as an advanced parking system. The proposed parking guidance system is easy to install because of sensor's small size and low cost. Additional features such as women's safety and fire alarm make it a multi-level advanced parking guidance system. Use of raspberry pi enables the service of IoT (Internet of things) so that future work such as automatically turning ON the lights/fans in parking area can be implemented by using the same.

REFERENCES

- [1] O. Dokur. Embedded system design of a real-time parking guidance system. Master's thesis, USF, 2015.
- [2] Y. Geng and C.G. Cassandras. A new smart parking system infrastructure and implementation. *Procedia-Social and Behavioral Sciences*, 54:1278–1287, 2012.
- [3] R. Vishnubhotla, P.S. Rao, A. Ladha, S. Kadiyala, A. Narmada, B. Ronanki, and S. Illapakurthi. Zigbee based multi-level parking vacancy monitoring system. In *Electro/Information Technology (EIT), 2010 IEEE International Conference on*, pages 1–4, May 2010.
- [4] G. Revathi and V.R.S. Dhulipala. Smart parking systems and sensors: A survey. In *Computing, Communication and Applications (ICCCA), 2012 International Conference on*, pages 1–5, Feb 2012.
- [5] A. Kianpisheh, N. Mustafa, P. Limtrairut, and P. Keikhosrokiani. Smart parking system (sps) architecture using ultrasonic detector. *International Journal of Software Engineering and Its Applications*, 6(3):55–58, 2012.
- [6] M.Y. Aalsalem, W.Z. Khan, and K.M. Dhabbah. An automated vehicle parking monitoring and management system using anpr cameras. In *Advanced Communication Technology (ICACT), 2015 17th International Conference on*, pages 706–710, July 2015.
- [7] [BOO+06] J. P. Benson, T. O'Donovan, P. O'Sullivan, U. Roedig, and C. Sreenan. —Car-park management using wireless sensor networks. In *Proceedings of 31st IEEE Conf. Local Computer Networks*, pages 588-595, Tampa, 2006.
- [8] R. Charette, —Smart Parking Systems Make It Easier to Find a Parking Space, <http://spectrum.ieee.org/green-tech/advanced-cars/smart-parkingsystems-make-it-easier-to-find-a-parking-space/0>, 2007.